



NAVAIR

INTERNATIONAL PVT. LTD.


HOLLOW METAL PRESS STEEL DOOR (NON FIRE)

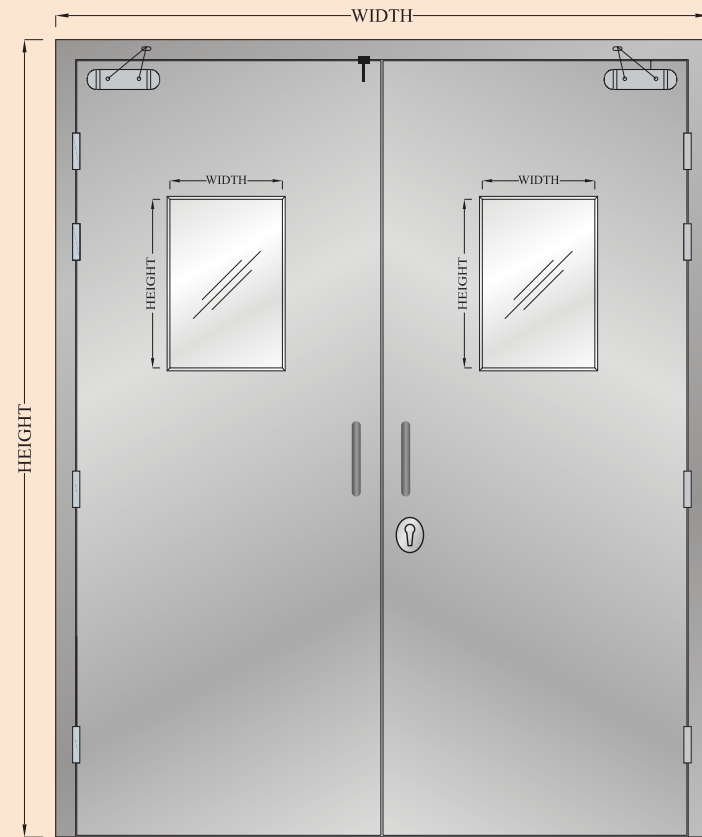


INNER FILLING

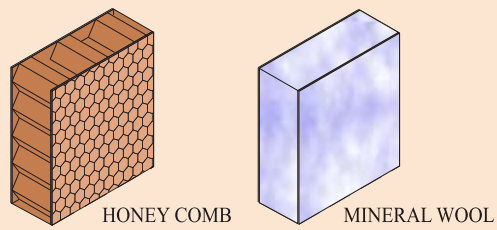


ANCHOR COVER

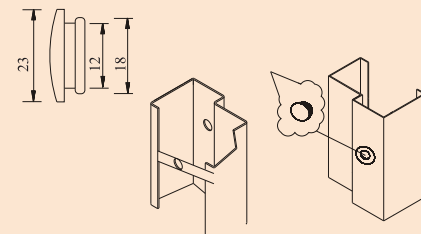

FRAME SECTION

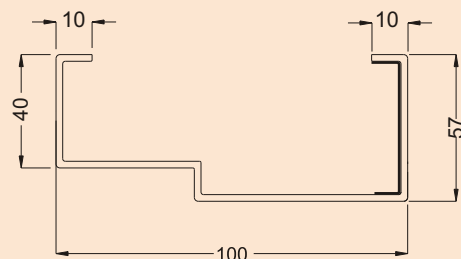

STEEL FRAME & SHUTTER SECTION

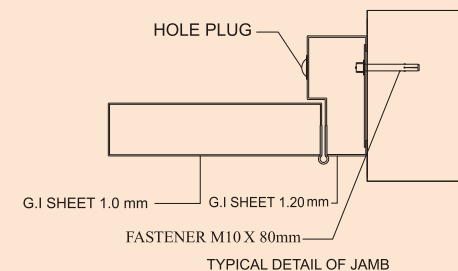

Door Type	Hollow Metal Press Steel Door (HMPS)
Rating	NA
Shutter Thickness	38mm - 49mm
Test Laboratory	NA

CONSTRUCTION DETAILS


Detail Description

- 1 Steel frame Profile Design as per CPWD profile (A/B/C/D/E)
- 2 Frame manufactured with 1.2mm Galvanised Steel
- 3 Shutter Thickness - 38mm - 49mm
- 4 Shutter Infill - Honeycomb/Mineral wool
- 5 Shutter manufactured with 0.8/1 mm Galvanised Steel

Recommended Finishes

- 1 Powder Coating in desired RAL Shade Code
- 2 SS304 Matt / Glossy Finish on demand

Frame Profile As Per CPWD Specification

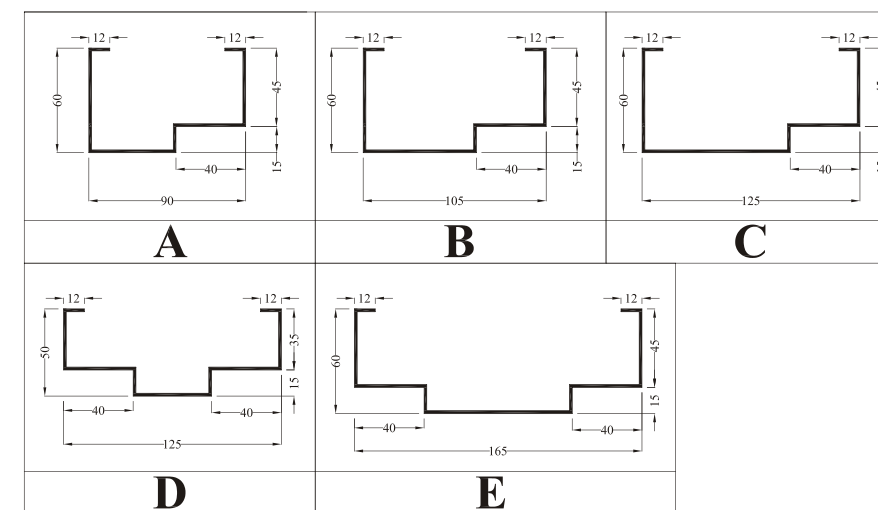



Indian Green Building Council




केंद्रीय भवन अनुसंधान संस्थान, रुद्रकी
CENTRAL BUILDING RESEARCH INSTITUTE, ROORKEE
(A Constituent Establishment of CSIR)



Corporate Office:

Navair International Pvt. Ltd.

59/17 Guru Ravidas Marg, 2nd Floor, Kalkaji Extn, New Delhi

 +91-11-46865000

 marketing@navairindia.com
info@navairindia.com



Website: www.navairindia.com